


## GAS RANGE BURNERS


### **AMBGR-4**


GAS RANGE BURNER  
- 4 BURNERS

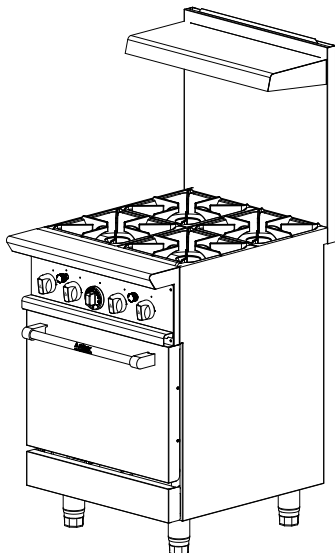

### **AMBGR-6**


GAS RANGE BURNER  
- 6 BURNERS

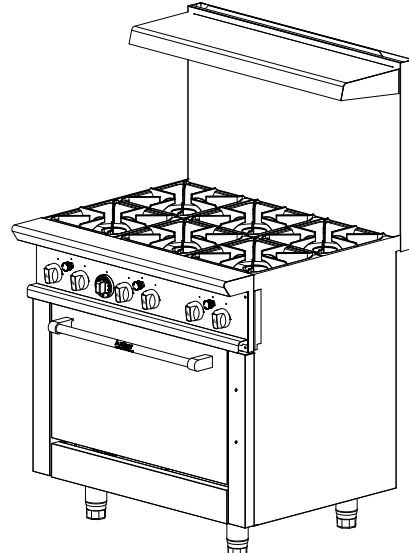




Temperature Knobs

Zinc cast and chrome plated knobs




Legs / Wheels

Adjustable legs (120-180mm)  
Optional: Caster wheels




Burners

Round cast iron and anti-clogging lift-off burners



Landing Ledge

4" bull nose design stainless steel landing ledge



Stainless Steel

Stainless steel front sides and backriser with 9" top shelf



Standing Pilot

Continuous and adjustable standing pilot on each burner for instant ignition




Thermostat

Dial-type electronic thermostat that displays °C and °F



Oven Door

Oven door features a spring-assisted, counterbalance system that requires no adjustment



Oven Interior

Porcelain-enamel oven interior side guides, rear, deck and door lining for easy cleaning



Oven Burner

Stainless steel tubular burner and radiant plate to ensure consistent cooking heat



Grease Tray

Full width grease tray



Grates

12x12" removable cast iron bowl grate design



Oven Racks

2 nickel plated racks with 3 rack position



Flush Mounted

Flush mounted top grates to front ledge



## TECHNICAL DATA



**AMBGR-4**



**AMBGR-6**

### BASIC

External Dimension WxDxH (mm)	610x800x1505	910x800x1505
Net Weight (kg)	122	165
Packing Dimensions WxDxH (mm)	700x920x1110	1000x930x1110
Shipping Weight (kg)	161	212

### BURNER AND OVEN DETAILS

Burner	4	6
Racks	2	2
Rack Size (mm)	500x525	660x525
Oven Internal Cavity WxDxH (mm)	508x571.5x349.3	660.4x571.5x349.3
Oven Temperature Range °C	+93 ~ +260	+93 ~ +260

### GAS SUPPLY DETAILS

	Natural	Propane	Natural	Propane
Rate Each Burner BTU/hr	30,000	27,000	30,000	27,000
Rate Total Rate BTU/hr	120,000	108,000	180,000	162,000
Oven Total Rate BTU/hr	33,000	28,000	33,000	28,000
Oven Total Rate BTU/hr	33,000	28,000	33,000	28,000
Total Rate BTU/hr	153,000	136,000	213,000	190,000
Manifold Gas Pressure	5"W.C. 12.44mbar	10"W.C. 25mbar	5"W.C. 12.44mbar	10"W.C. 25mbar
Orifice Size for Burner	#41	#53	#41	#53
Orifice Size for Oven	#38	#53	#38	#53

### CLEARANCES

	Combustible	Non-Combustible	Combustible	Non-Combustible
Right Side	6"	0"	6"	0"
Left Side	6"	0"	6"	0"
Rear	6"	6"	6"	6"


### ACCESSORIES

Caster Wheels	Optional Ø101.6mm / 4" H130mm	Optional Ø101.6mm / 4" H130mm
---------------	----------------------------------	----------------------------------

- \* This product is NOT approved for residential use
- \* Minimum supply pressure is 5 inches of water column for natural gas and 10 inches of water column for propane.
- \* Orifice sizes are for units installed at altitudes between 0 and 2000 feet above sea level.



## AMBGR-4

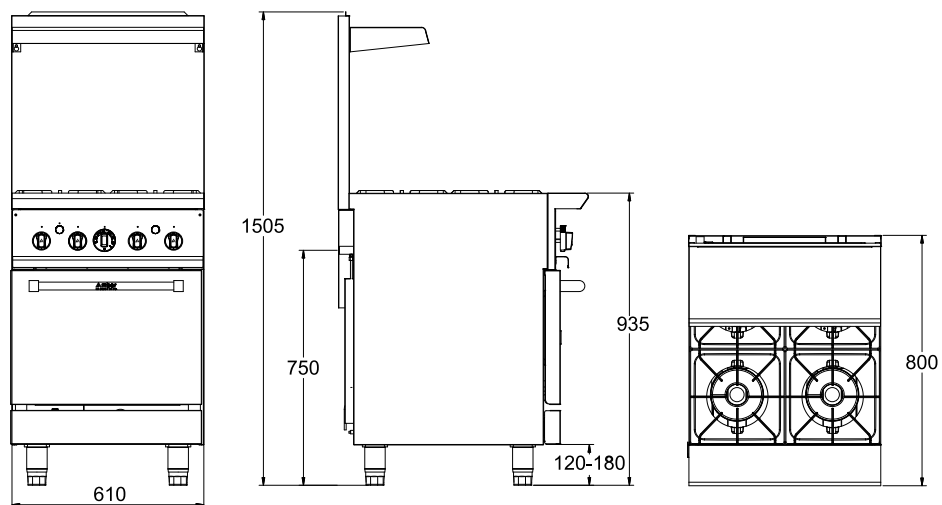

## AMBGR-6

