


GAS SALAMANDER

AMBGS-900





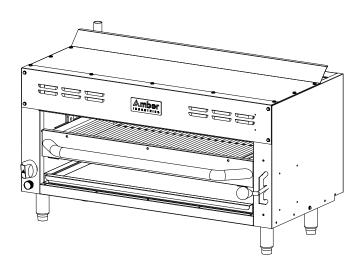





Gas-fired infrared burners



Continuous and adjustable standing pilot



Removable and spring balanced rack for easy cleaning and safe rack lifting



Full width grease tray



Stainless steel exterior and interior



Adjustable and non-skid feet (100-135mm)



3- position ball grip handle



Zinc cast and chrome plated knob



TECHNICAL DATA	AMBGS-900	
BASIC		
External Dimension WxDxH (mm)	916x608x560	
Net Weight (kg)	58	
Packing Dimensions WxDxH (mm)	990x670x600	
Shipping Weight (kg)	85	
20GP/40GP	54/144	
GAS SUPPLY AND BURNER DE	TAILS	
Burner	1	
Burner Total Rate BTU/hr (NG)	35,000	
Burner Total Rate BTU/hr (LP)	32,000	
MANIFOLD GAS PRESSURE		
Natural	5"W.C. 12.44mbar	
Propane	10"W.C. 25mbar	
ORIFICE SIZE	<u> </u>	
Natural	#32	
Propane	#47	
CLEARANCES	Combustible	Non-Combustible
Right Side	2"	0"
Left Side	2"	0″
Rear	2″	0″

This product is NOT approved for residential use

Γ

Minimum supply pressure is 5 inches of water column for natural gas and 10 inches of water column for propane. Orifice sizes are for units installed at altitudes between 0 and 2000 feet above sea level.

