


THERMOSTATIC CHROME GRIDDLE


AMBTG-24

THERMOSTATIC GRIDDLE 24"

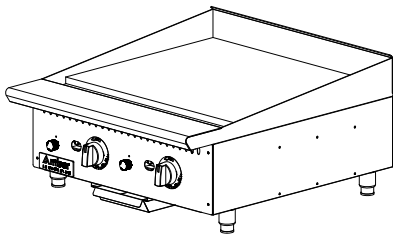

AMBTG-36

THERMOSTATIC GRIDDLE 36"

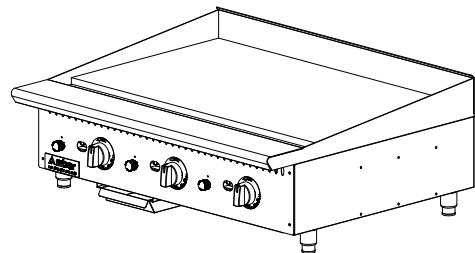



**CHROME PLATED
STAINLESS STEEL**



THERMOSTATIC



Griddle Plate

1" thick griddle plate



Grease Trough

3" grease trough



Standing Pilot

Continuous and
adjustable standing pilot



Grease Tray

Easy to clean grease tray



Material

Chrome plated stainless
steel exterior



Feet

Adjustable and non-skid
feet (60-80mm)



Landing Ledge / Splash Guard

4" Chrome plated stainless
steel landing ledge with a
bull nose design and 3"
fully welded splash guard



Thermostat Knobs

Zinc cast and 66-260 °C
thermostat range



TECHNICAL DATA				
	AMBTG-24		AMBTG-36	
	BASIC			
	External Dimension WxDxH (mm)	610x769x352	910x769x352	
Net Weight (kg)	71	100		
Packing Dimensions WxDxH (mm)	700x850x490	1000x850x490		
Shipping Weight (kg)	109	154		
20GP/40GP	84/215	52/130		
GAS SUPPLY AND BURNER				
Burner	2	3		
Thermostat Range (°C)	66~260	66~260		
Rate Each Burner BTU/hr	28,000	28,000		
Total Rate BTU/hr	56,000	84,000		
MANIFOLD GAS PRESSURE				
Natural	5"W.C. 12.44mbar	5"W.C. 12.44mbar		
Propane	10"W.C. 25mbar	10"W.C. 25mbar		
ORIFICE SIZE				
Natural	#39	#39		
Propane	#52	#52		
CLEARANCES				
	Combustible	Non-Combustible	Combustible	Non-Combustible
Rlght Side	0"	0"	0"	0"
Left Side	0"	0"	0"	0"
Rear	6"	6"	6"	6"
Counter Top	Non-combustible material		Non-combustible material	


* This product is NOT approved for residential use

* Minimum supply pressure is 5 inches of water column for natural gas and 10 inches of water column for propane.

* Orifice sizes are for units installed at altitudes between 0 and 2000 feet above sea level.



AMBTG-24

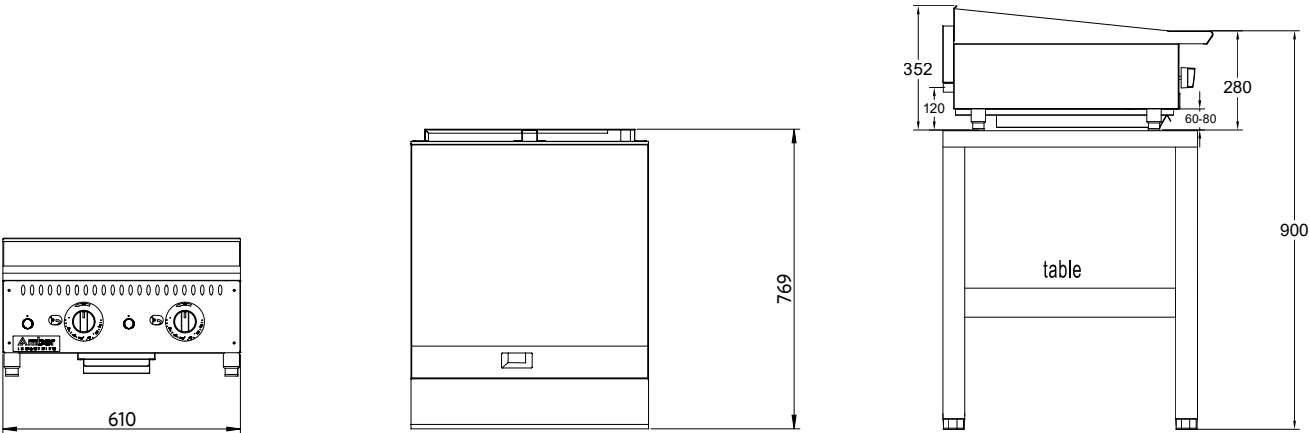

AMBTG-36

